


Retractable Locating Pin

anti rotating function, 120 mm stroke

SZK... .2 BR3

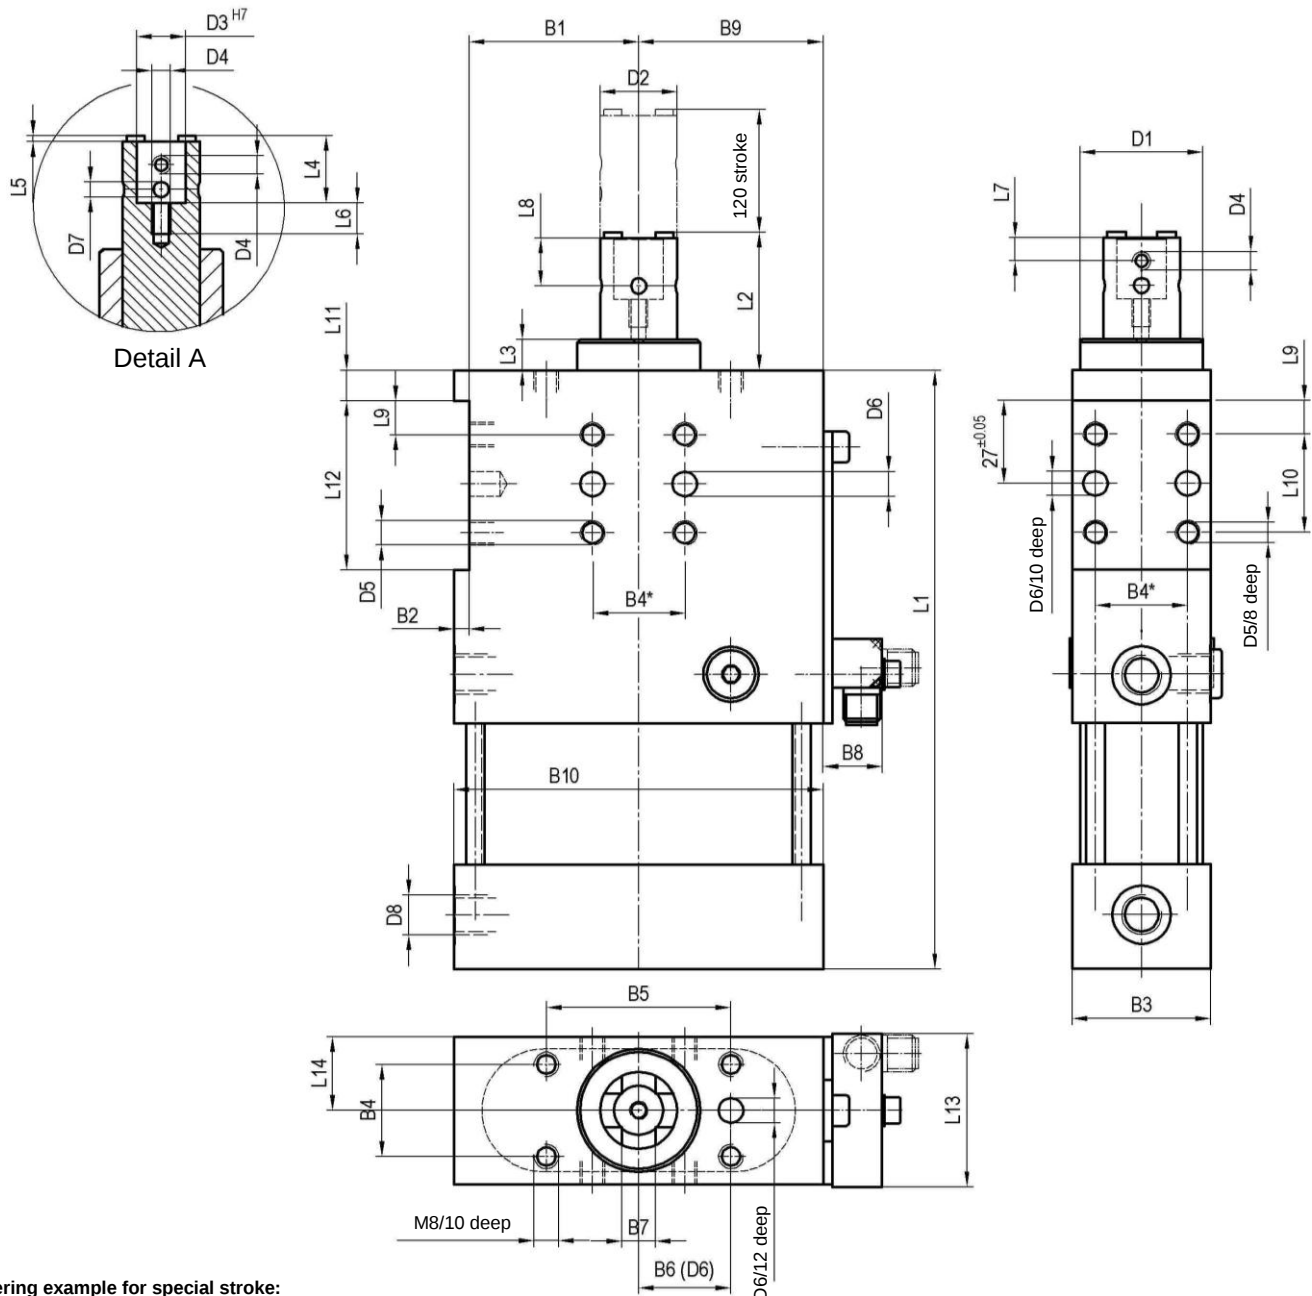

Ordering example for special stroke:

SZK 40.2 BR3 T12 x 70

SZK 40.2 BR3: Type
T12: Sensing system
70: Special stroke (>60 ≤ 120 mm)

*Tolerance for dowel holes ± 0.02, for threaded holes ± 0.1.

Medium: Air, max. 6 bar, operation permitted with oil free air.

Ordering example Tünkers sensing systems:

...T00 Without sensing
...T12 Inductive sensor 24 V, 1 output
with integrated LED's

Attention!

External throttle check valves must be provided on assembly.
They are not included in the scope of delivery!

Type	Stroke	Stat. side force max. (N)	Corresp. piston Ø (mm)	Weight ~ (kg)
SZK 40.2 BR3	120	150 N	40	2.3
SZK 63.2 BR3	120	200 N	63	3.1

Type	B1 ±0.1	B2	B3	B4*	B5 ±0.2	B6 ±0.02	B7 +0.1/-0.05	B8	B9	B10	D1 f7	D2 f7	D3 H7	D4	D5	D6 H7	D7
SZK 40.2 BR3	32.5	5	45	30	60	30	11	21	37.5	75	40	25	16	M6	M8	8	5
SZK 63.2 BR3	55	5	45	30	60	30	11	21	60	120	40	25	16	M6	M8	8	5

Type	D8	L1	L2	L3	L4	L5	L6	L7	L8	L9 ±0.1	L10 ±0.1	L11	L12 +0.1	L13	L14 +0.1
SZK 40.2 BR3	G1/8	355	45	10	22	2	10	7.5	15.5	11	32	10	55	47	22.5
SZK 63.2 BR3	G1/4	355	45	10	22	2	10	7.5	15.5	11	32	10	55	47	22.5