


Retractable Locating Pin

with push rod adapter to mount contour pieces,
toggle locked end position

SZV.1 40 A10

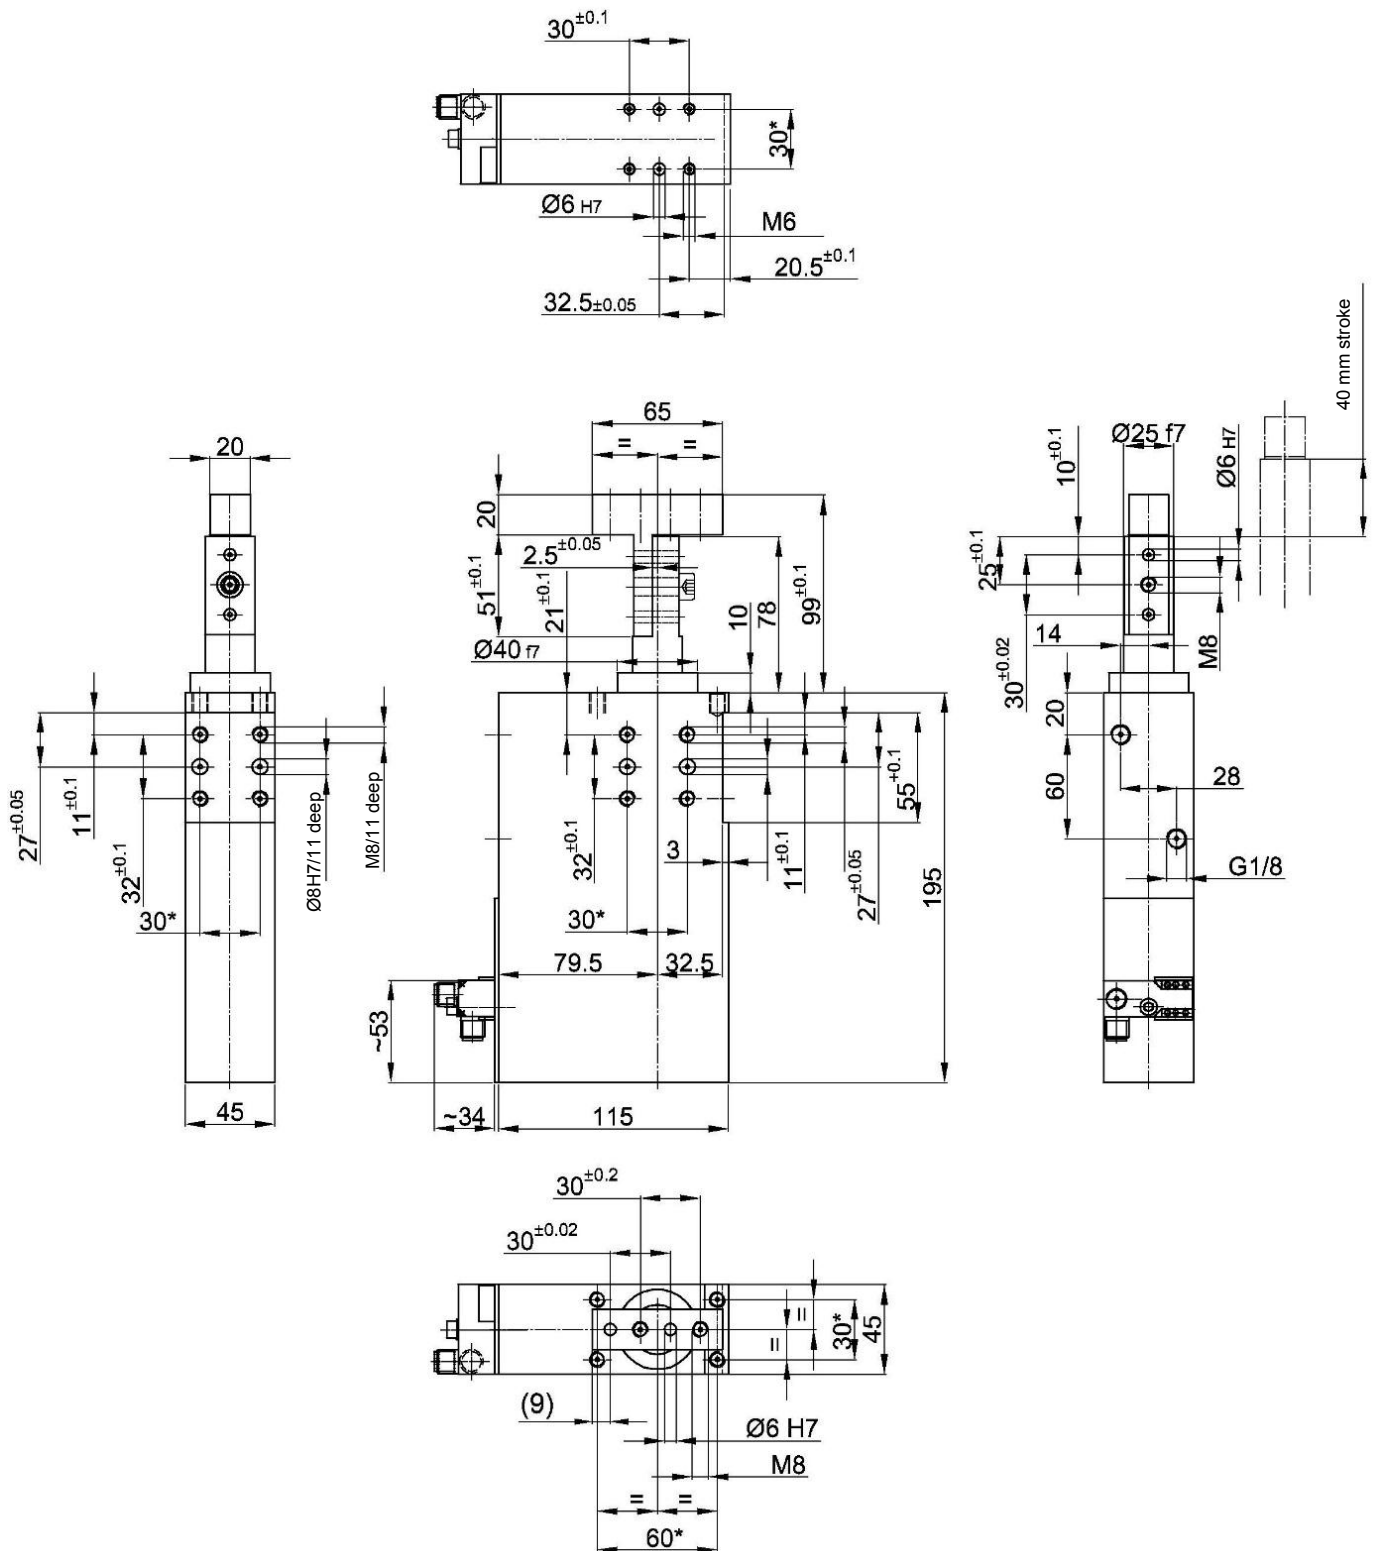

Ordering example:

SZV.1 40 A10 T12

SZV.1 40 A10: Type
T12: Sensing system

Ordering example Tünkers sensing system:

...T12 Inductive sensor 24 V, 1 output
with integrated LED's

Shearing force: 450 N at 6 bar
Tensile force: 360 N
Shear load: 300 N
Piston Ø: 40
Weight: 3.4 kg

*Tolerance for dowel holes ± 0.02 , for threaded holes ± 0.1 .
Medium: Air, max. 6 bar, operation permitted with oil-free air.

Attention!

External throttle check valves must be provided on assembly.
They are not included in the scope of delivery!