


Retractable Locating Pin

For central pin assembly, toggle locked end position

SZV.1 40 B

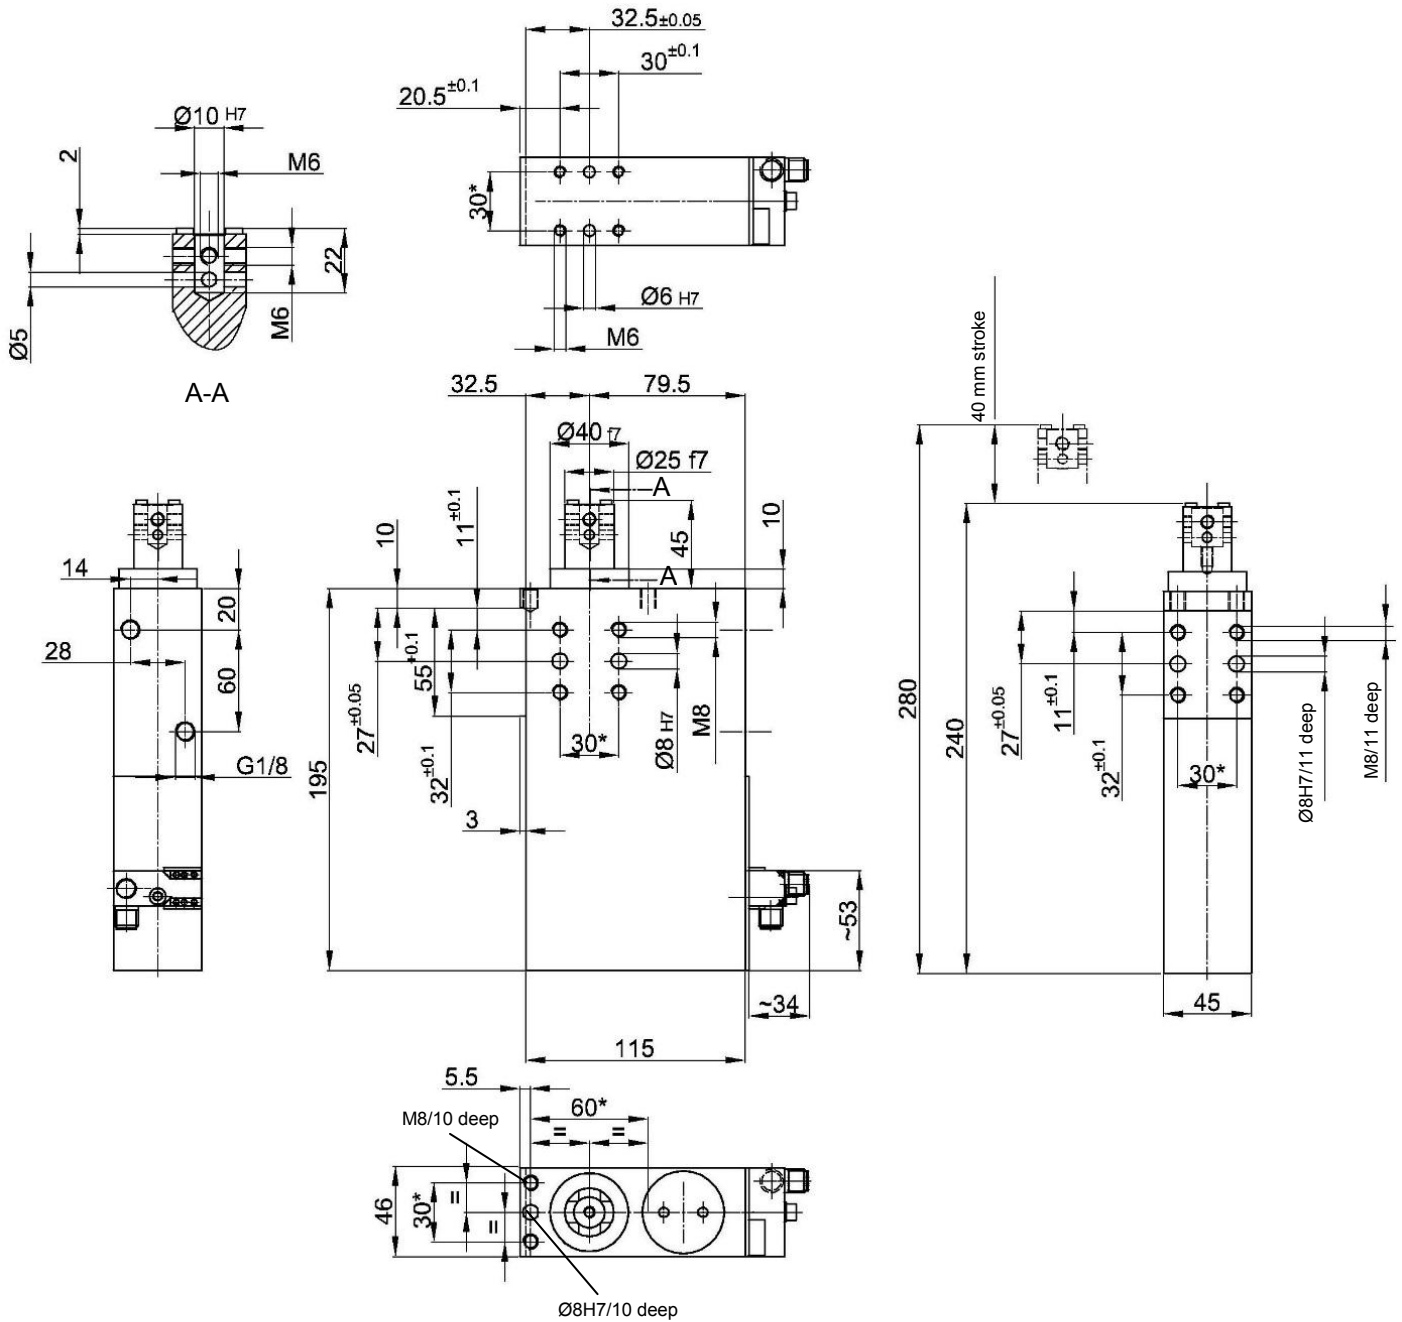

Ordering example:

SZV.1 40 B T12

SZV.1 40 B: Type
T12: Sensing system

Ordering example Tünkers sensing system:

...T12 Inductive sensor 24 V, 1 output with integrated LED's

Retractable Pin Cylinder with hand lever see data sheet "SZV.1 40 Z A01".

Shearing force: 450 N at 6 bar
Tensile force: 360 N
Shear load: 300 N
Piston Ø: 40
Weight: 3.4 kg

Attention!

External throttle check valves must be provided on assembly. They are not included in the scope of delivery!

*Tolerance for dowel holes ± 0.02 , for threaded holes ± 0.1 .

Medium: Air, max. 6 bar, operation permitted with oil-free air.