


# Underbody Clamp

for positioning and clamping

KNZ 40 UZ..

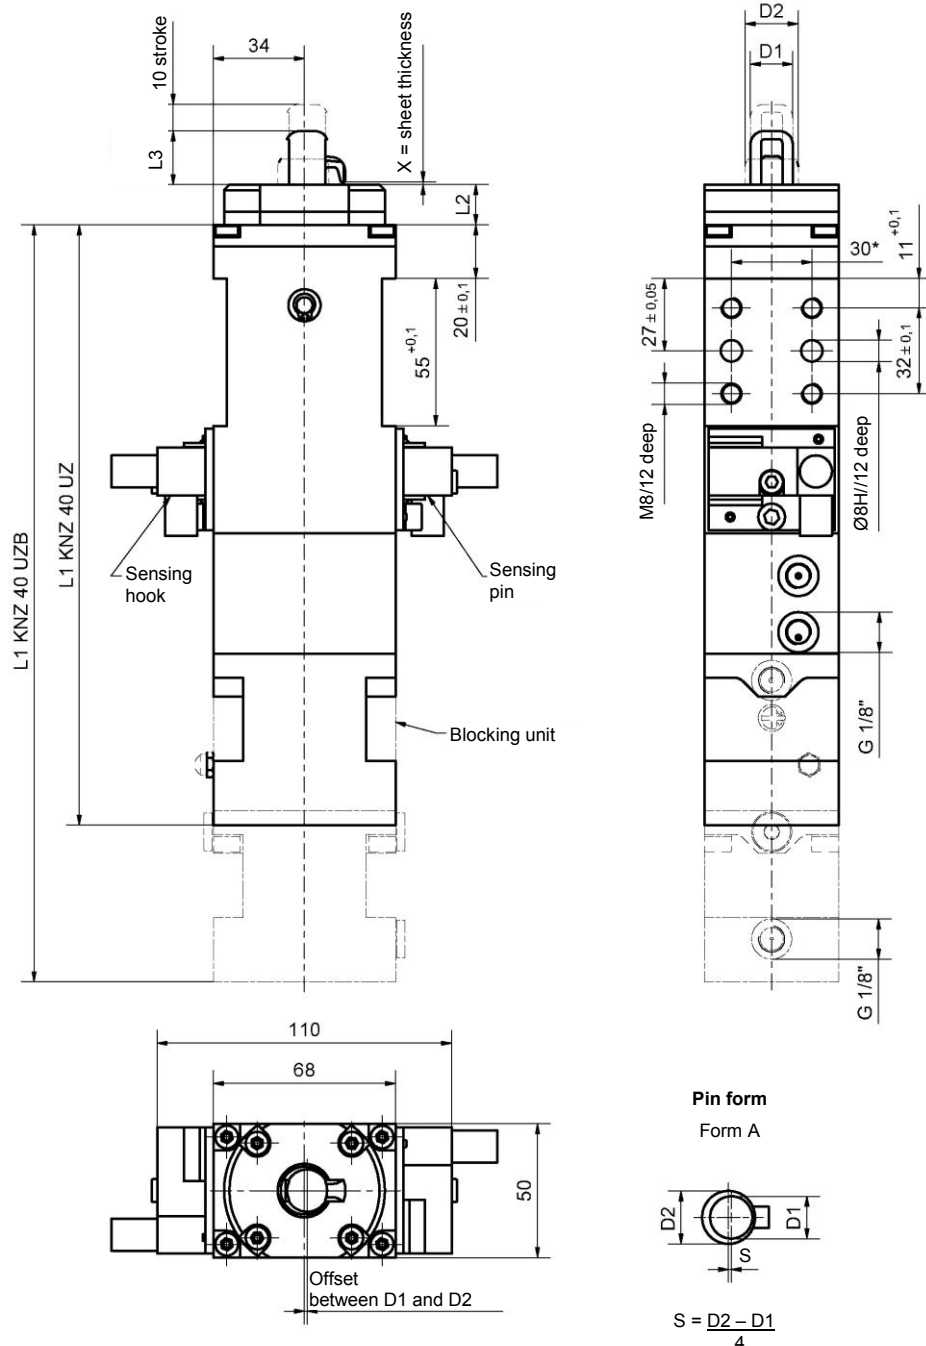

## Example for request:

KNZ 40 UZB 1A20/16\_45 T12 X=4.2

KNZ 40 UZB: Type  
 1: Hook position  
 A: Pin form  
 20: Pin diameter „D2“  
 16: Pin diameter „D1“  
 45: Height L2  
 T12: Sensing system  
 X=4.2 Sheet thickness „X“

Please send your request example to our design office.

After checking your request you will receive an individual article number for the requested Underbody Clamp.

Actual, transferable force (\*\*) depends on pin diameter and geometry of the hook.

## Attention!

External throttle check valves must be provided on assembly. They are not included in the scope of delivery!

\*Tolerance for dowel holes  $\pm 0.02$ , for threaded holes  $\pm 0.1$ .

Medium: Air, max. 8 bar, operation permitted with oil-free air.

## Ordering example Tünkers sensing systems:

...T00 Without sensing system  
 ...T12 Inductive sensor 24 V, 1 output with integrated LEDs

Type	Holding force** max.	Clamping force** at 6 bar	Weight ~ (kg)	L1
KNZ 40 UZ	500 N	500 N	3.0	224
KNZ 40 UZB	1000 N	500 N	3.5	282.5

D1 Pin Ø	D2 Pin Ø	L2 Height	L3	X Sheet thickness