




CBxx Series for Joining

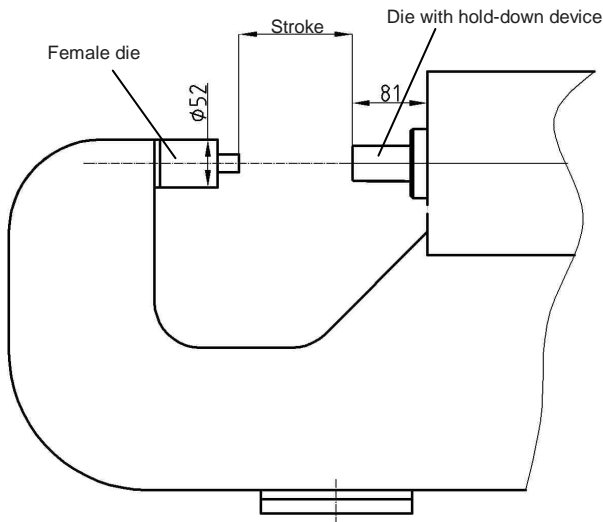


CBxx Series for Piercing

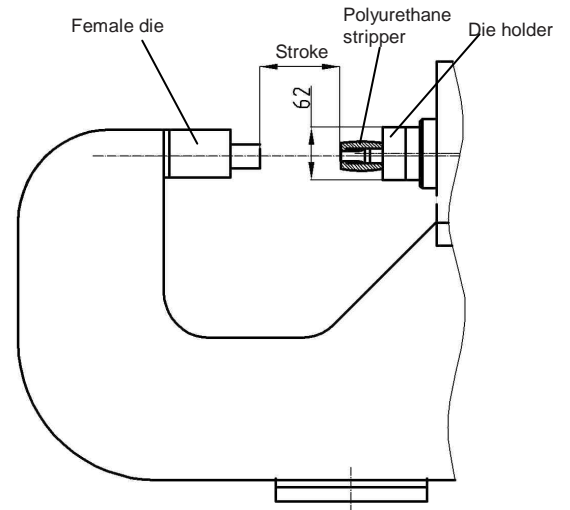

CBxx Series for Stamping

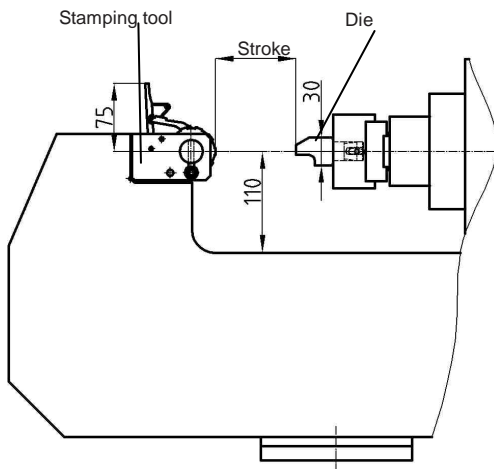

CBxx-Serie zum Prägen (mit Typenhalter)

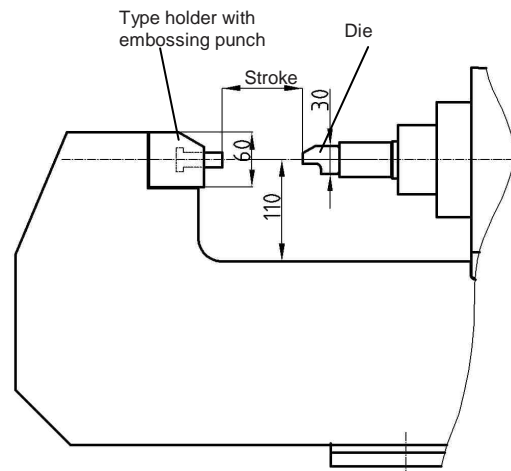

Please refer to the data sheets CBHA, CBHZ and CBMZ for further information on the C-frame systems.

*Tolerance for stud boreholes: ± 0.02 , for threaded holes: ± 0.1 .

Medium: Air, max. 6 bar, operation with oil-free air admissible.