


Pneumatic Marking Unit


with stamping tool 8 digit, 6 mm high
last 3 digits changing automatically

PFS 900-120 PU 6-8/A3 (263437)

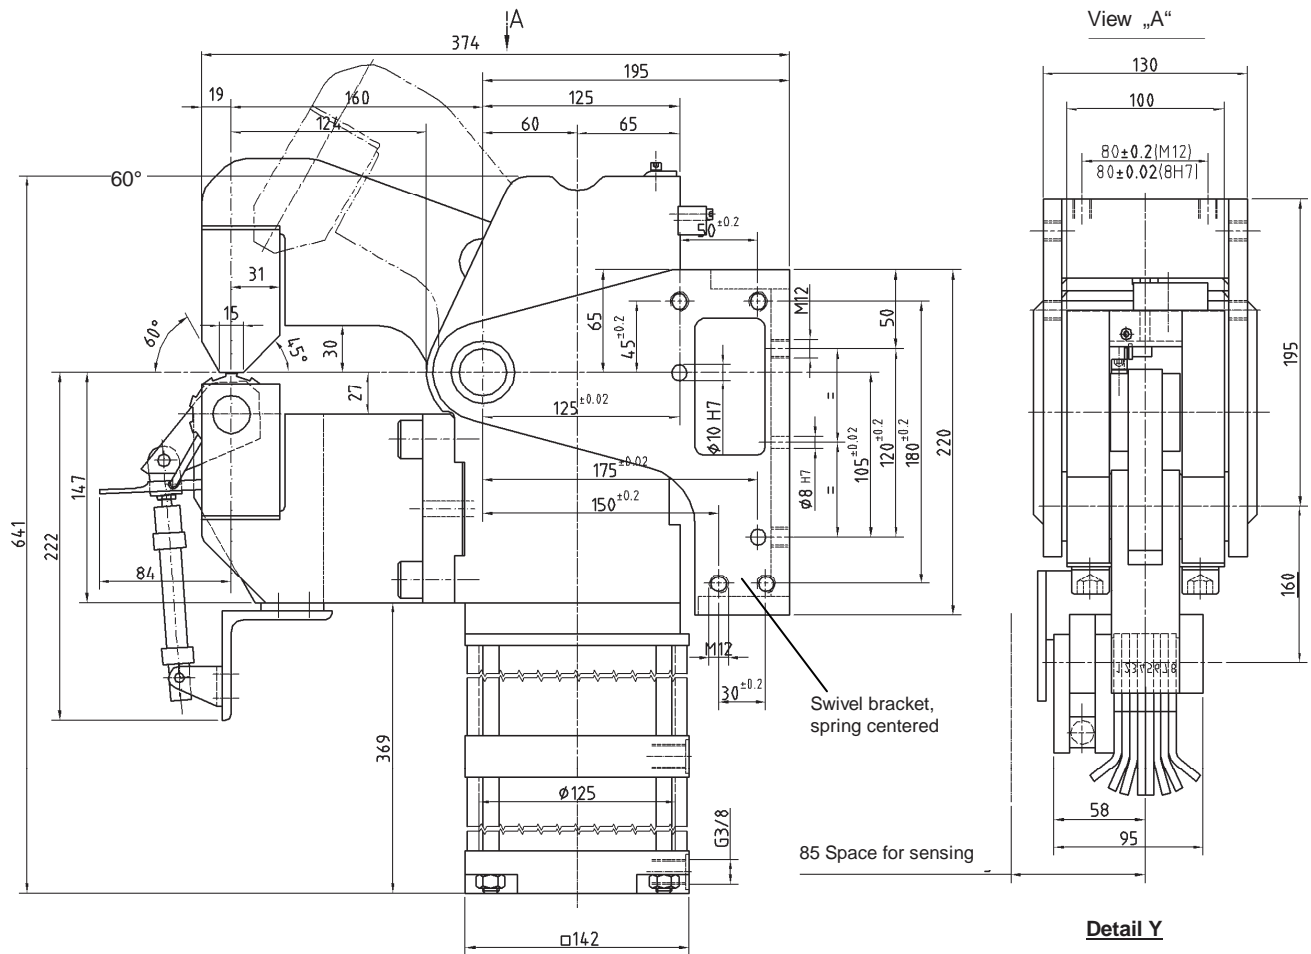

Detail Y

Place for marking
height of letters 6 mm

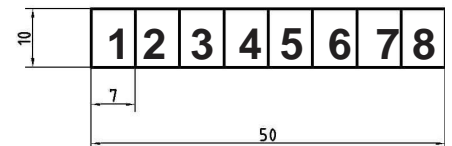

Ordering example:

PFS 900-120 PU 6-8/A3

PFS 900: Type
120: Distance of load center
PU: Stamping tool at the bottom
6: Height of letters (mm)
8: Number of digits
A3: The last 3 digits are changing automatically

Technical data:

Pressing force: 45 kN
Working pressure: 5 bar
Distance of load center: approx. 120mm¹
Medium: Compressed air
Tool: Stamping tool with 8 digit, 6 mm letter high, the last 3 digits are changing automatically via pneumatic cylinder²
Opening angle: 60°

¹Further distances of load center on request.

²For further stamping tool versions see data sheet "P...".

* Tolerance for dowel holes ± 0,02, for threaded holes ± 0,1.

Medium: Air, max. 6 bar, operation permitted with oil-free air.

Ordering example Tünkers sensing systems:

...T12 Inductive sensor 24 V 1 output with integrated LED's
...T08 Pneumatic sensing, 1 pressure pipe

