
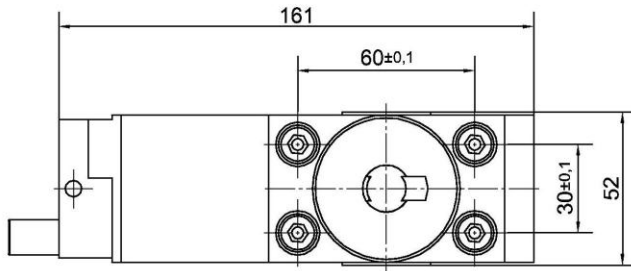
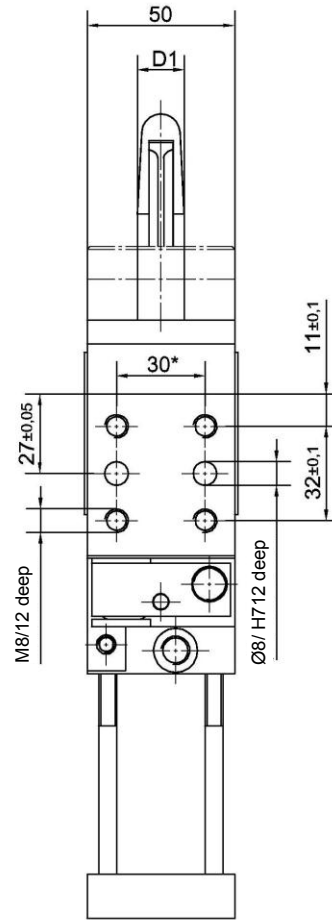


Underbody Clamp


for positioning and clamping, for seat Ø 20-40 mm

K 32 UZ

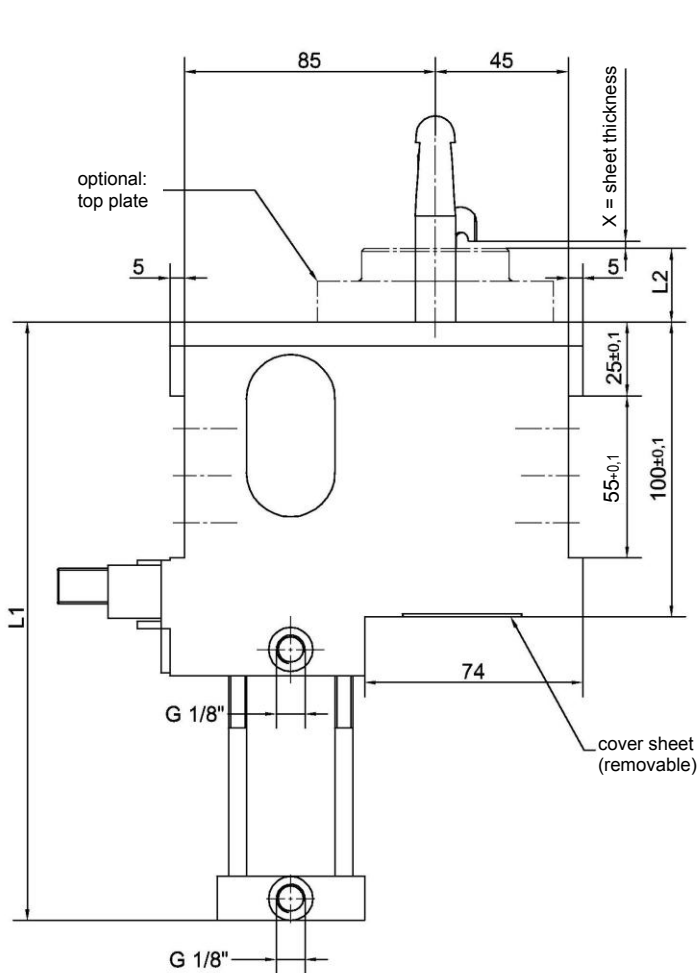

Hook position

1
standard position







Pin forms

Form A

Form B

Form C

Form N
without pin



Example for request:

K 32 UZ 1A30_45 T12 X=4.2

K 32 UZ: Type
1: Hook position
A: Pin form
30: Pin diameter D1
45: Height L2
T12: Sensing system
X=4.2: Sheet thickness X

Please send your request example to our design office.

After checking your request you will receive an individual article number for the requested Underbody Clamp.

Medium: Air, max. 6 bar, operation permitted with oil-free air.

*Tolerance for dowel holes ± 0.02 , for threaded holes ± 0.1 .

Attention!

External throttle check valves must be provided on assembly. They are not included in the scope of delivery!

Ordering example Tünkens sensing systems:

...T00 Without sensing system
...T12 Inductive sensor 24 V, 1 output with integrated LEDs

| Type | Holding force max. | Clamping force at 6 bar | Weight ~ (kg) | L1 | D1 Pin Ø | L2 Height | X Sheet thickness | B1 |
|---------|--------------------|-------------------------|---------------|-----|----------|-----------|-------------------|----|
| K 32 UZ | 2500 N | 1800 N | 2.4 | 203 | | | | |

