
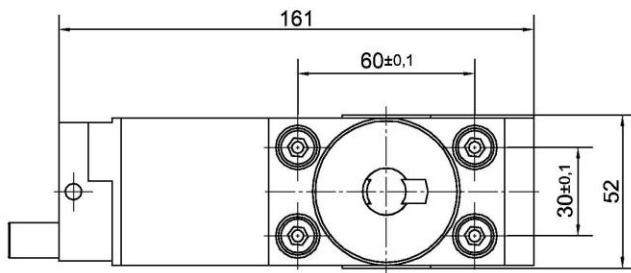
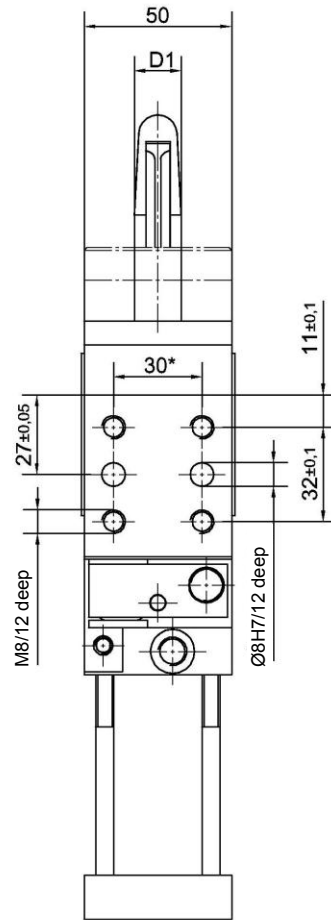


Underbody Clamp


for positioning and clamping, for seat Ø 20-40 mm,
with dirt deflector to protect the mechanics

K 32.1 UZ HR

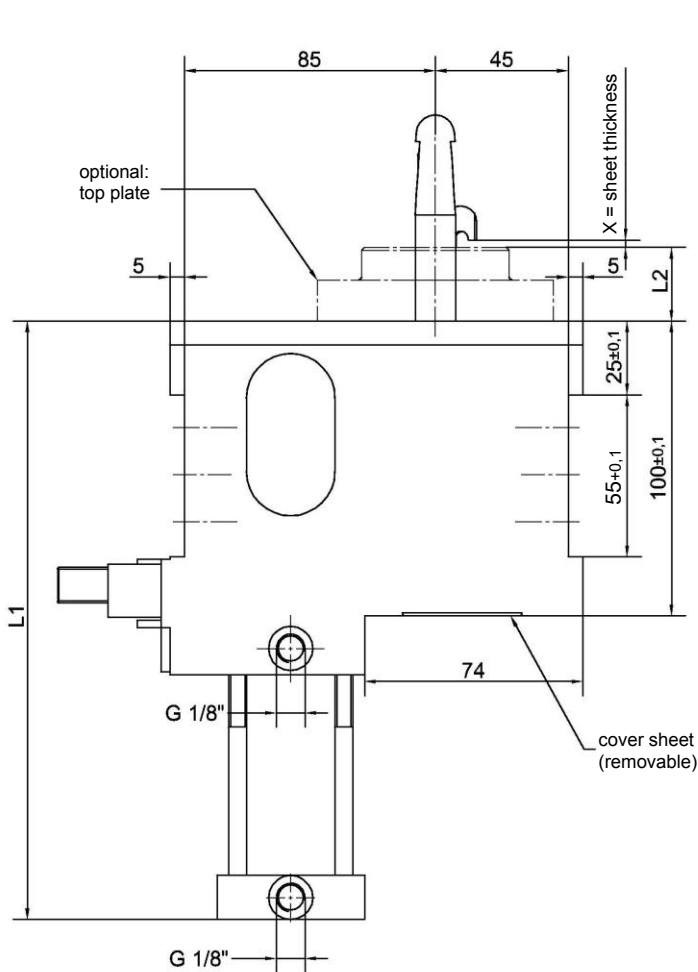

Hook position

1
standard position







Pin forms

Form A

Form B

Form C

Form N
without pin



Example for request:

K 32.1 UZ HR 1A30_45 T12 X=4,2

K 32.1 UZ HR: Type
1: Hook position
A: Pin form
30: Pin diameter D1
45: Height L2
T12: Sensing system
X=4.2: Sheet thickness X

Please send your request example to our design office.

After checking your request you will receive an individual article number for the requested Underbody Clamp.

Actual, transferable force (**) depends on pin diameter and geometry of the hook.

Attention!

External throttle check valves must be provided on assembly. They are not included in the scope of delivery!

*Tolerance for dowel holes ± 0.02 , for threaded holes ± 0.1 .

Medium: Air, max. 6 bar, operation permitted with oil-free air.

Ordering example Tünkers sensing systems:

...T00 Without sensing system
...T12 Inductive sensor 24 V, 1 output

Type	Holding force** max.	Clamping force at 6 bar	Weight ~ (kg)	L1	D1 Pin Ø	L2 Height	X Sheet thickness	B1
K 32.1 UZ HR	2500 N	1800 N	2,4	203				

