


# Retractable Locating Pin

Manual version, anti rotating, toggle locked

**MSZK 40.1**  
60 mm stroke

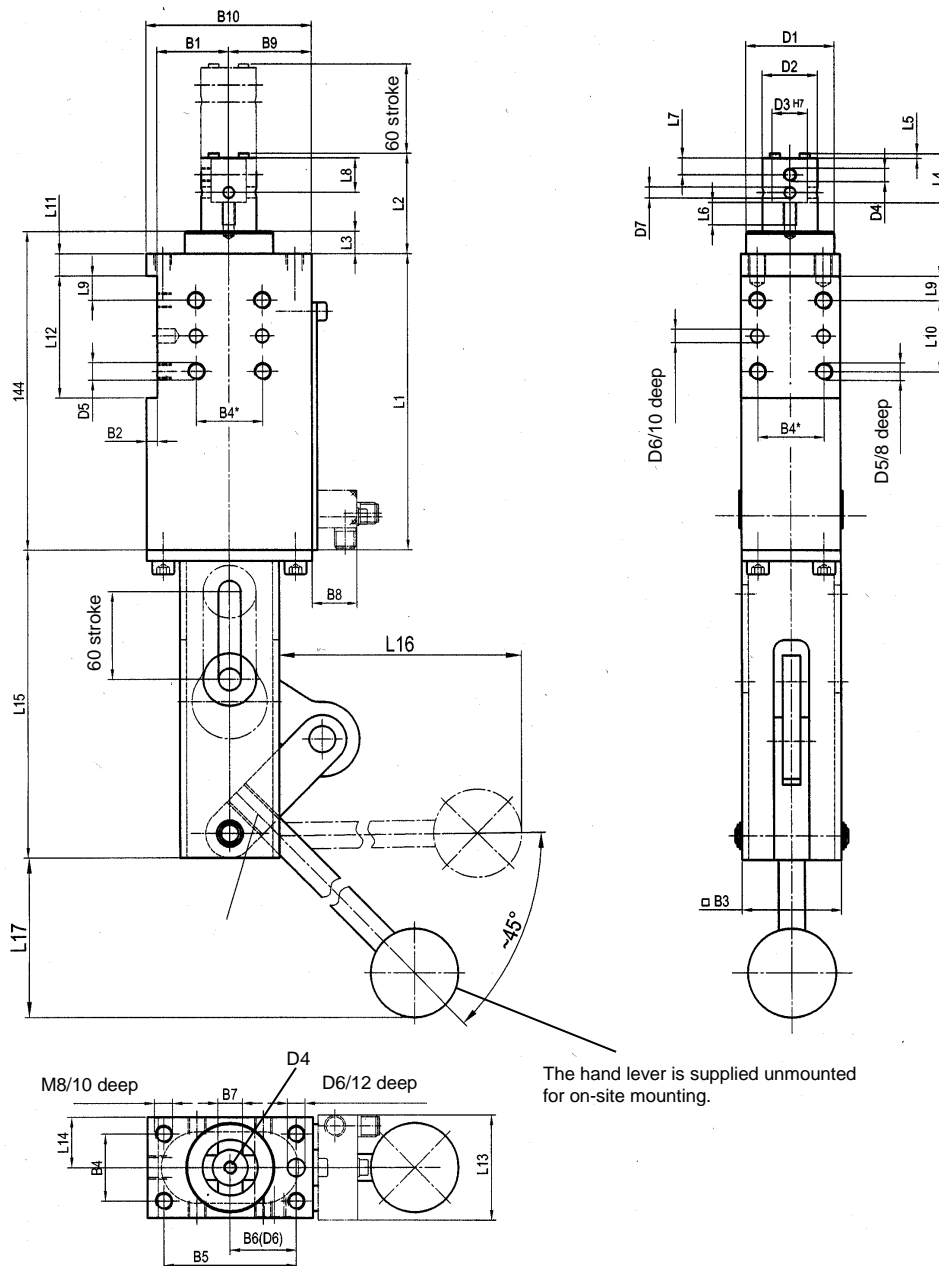

The hand lever is supplied unmounted for on-site mounting.

**Ordering example:**

MSZK 40.1 T00

MSZK 40.1: Type  
T00: Sensing system

**Ordering example Tünkers sensing system:**

...T00 Without sensing

**Optional:**

T12 Inductive sensor 24 V, 1 output with integrated LED's

\*Tolerance for dowel holes  $\pm 0.02$ , for threaded holes  $\pm 0.1$ .

Type	Stroke	Stat. side force max.	Piston $\varnothing$	Weight ~ (kg)	B1 $\pm 0,1$	B2	B3	B4*	B5 $\pm 0,2$	B6 $\pm 0,02$	B7 $+0,1$ $+0,05$	B8	B9	B10	D1 $f7$
MSZK 40.1	60	150 N	40	1.8	32.5	5	50	30	60	30	11	21	37..5	75	40

Type	D2 $f7$	D3 $H7$	D4	D5	D6 $H7$	D7	D8	L1	L2	L3	L4	L5	L6	L7	L8	L9 $\pm 0,1$	L10 $\pm 0,1$	L11	L12 $+0,1$	L13	L14 $+0,1$	L15
MSZK 40.1	25	16	M6	M8	8	5	-	134	45	10	22	2	10	7.5	15.5	11	32	10	55	47	22.5	160