


Retractable Locating Pin

for centering pins, anti rotating function, 60 mm stroke, with hand lever

SZK... .1 BR3 Z

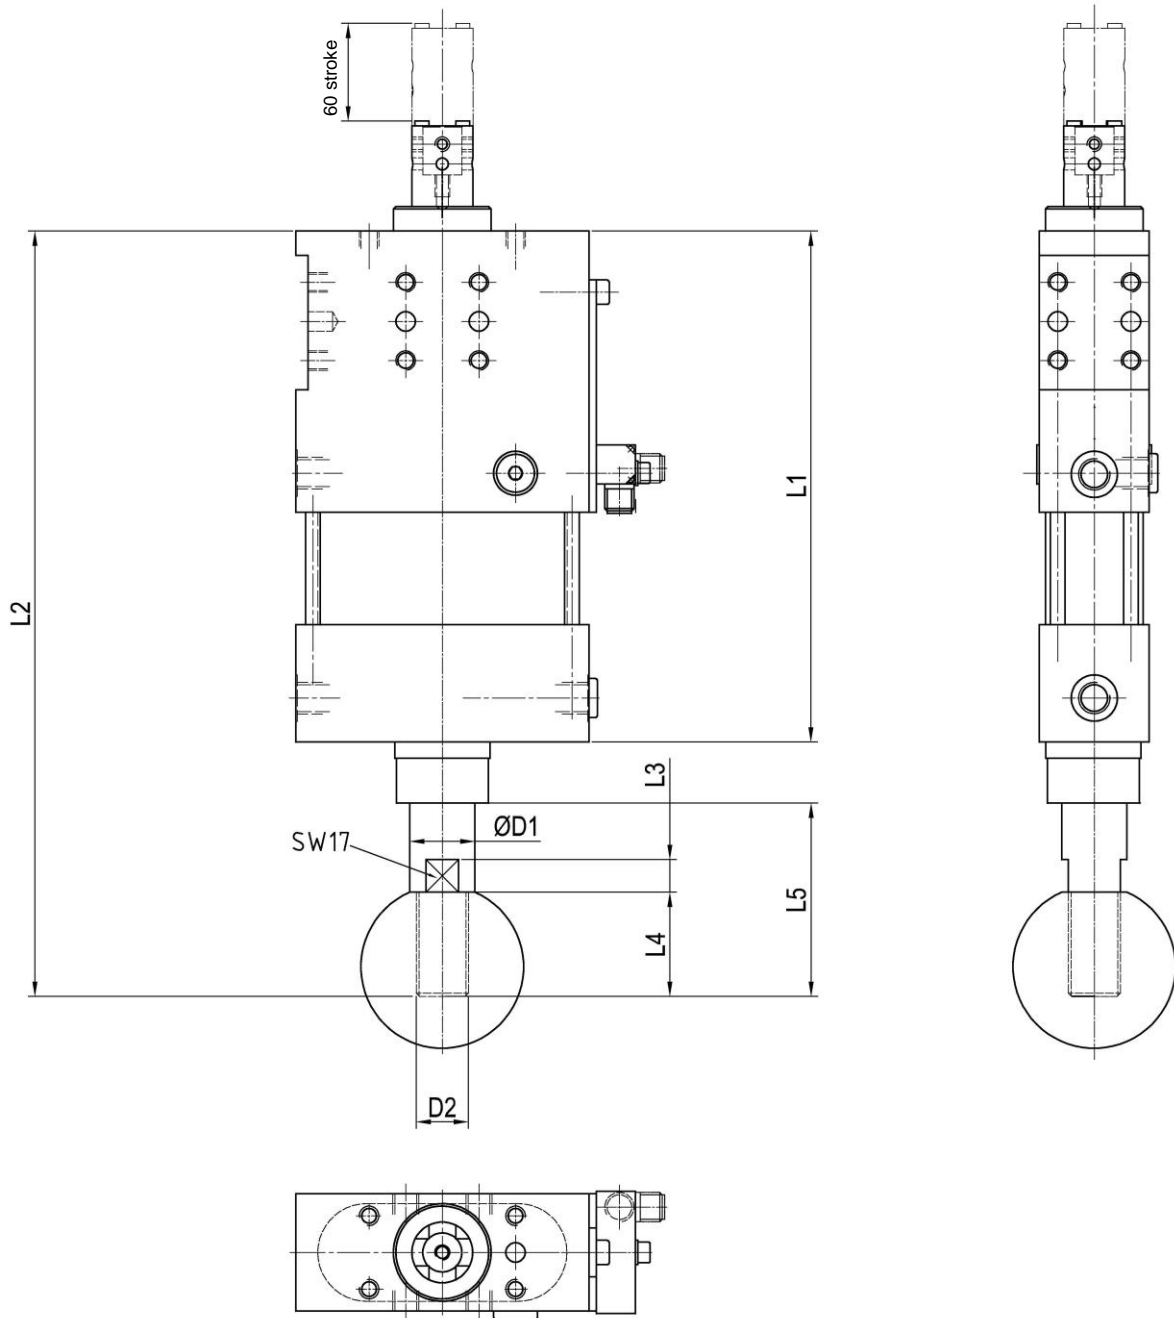

Ordering example:

SZK 40.1 BR3 Z T12

SZK 40.1 BR3: Type
Z: With hand lever
T12: Sensing system

Ordering example Tünkers sensing systems:

...T00 Without sensing
...T12 Inductive sensor 24 V, 1 output with integrated LED's

Attention:

A 5/3-way valve is required, central position de-aerated.

For further technical information see data sheets:
SZK... .1 BR3, SZK... .1 BR3 B, SZK... .1 BR3 A02,
SZK... .1 BR3A..2

Attention!

External throttle check valves must be provided on assembly. They are not included in the scope of delivery!

*Tolerance for dowel holes ± 0.02 , for threaded holes ± 0.1 .

Medium: Air, max. 6 bar, operation permitted with oil-free air.

Type	Stroke	Stat. shear force max.	Corresp. piston \varnothing	Weight ~ (kg)	L1	L2	L3	L4	L5	D1 f7	D2
SZK 40.1 BR3 Z	60	150 N	40	2.7	250	378	10	32	104	20	M16x1.5
SZK 63.1 BR3 Z	60	200 N	63	3.5	250	378	10	32	104	20	M16x1.5

