


# Slide unit

Max. stroke 200 mm

with end position cushioning. optional: locking and protection plate

# LE 60

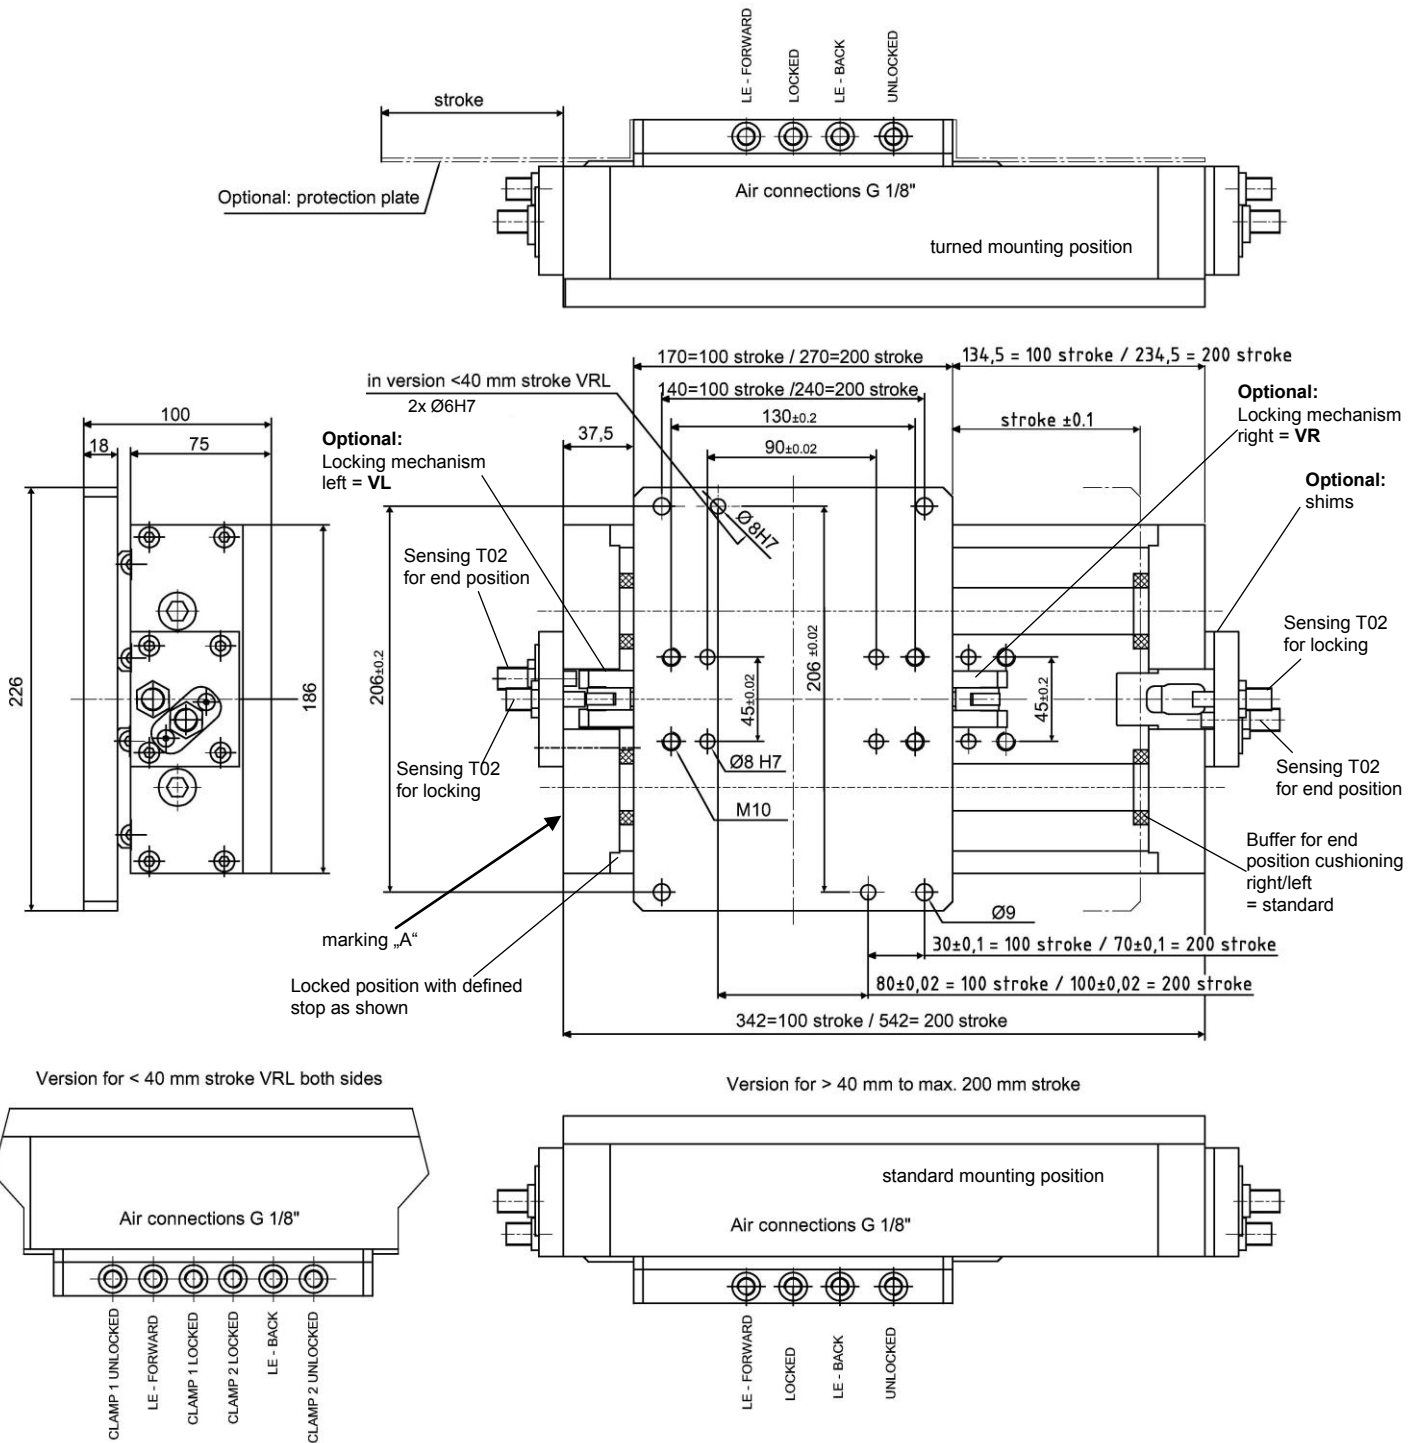

### Ordering example

LE 60 100 VR SB T02

LE 60: Type  
 100: Stroke  
 VR: Option: Locking mechanism right  
 SB: Option: Protection plate  
 T02: Sensing system

### Ordering example Tünkers sensing systems:

...T00 Without sensing  
 ...T02 Inductive sensor 24 V. 2 outputs without LED's

### Standard strokes:

100 mm. 200 mm  
 Reduced strokes for LE 60-100 (10-100 mm) and LE 60-200 (110-200 mm) on request.

### Weight:

100 mm stroke = approx. 13.5 kg  
 200 mm stroke = approx. 16.8 kg

G max. 30 kg  
 M max. 60 Nm (see separate data sheet)  
 Cylinder force at 5 bar = 1750 N  
 Repeatability: ± 0.1

### Optional:

**VR:** Locking mechanism right  
**VL:** Locking mechanism left  
**VRL:** Locking mechanism right and left

**SB:** Protection plate

### Special accessories:

Shock absorber for end position cushioning on request.

\*Tolerance for dowel holes ± 0.02 for threaded holes ± 0.1.