

Tabbing device

for folding straps

SZ 50 UZ-LB

Normal position


Clamping hook and locating pin retracted

Center position

Clamping hook retracted, locating pin extended

End position:

Clamping hook locked, locating pin extended

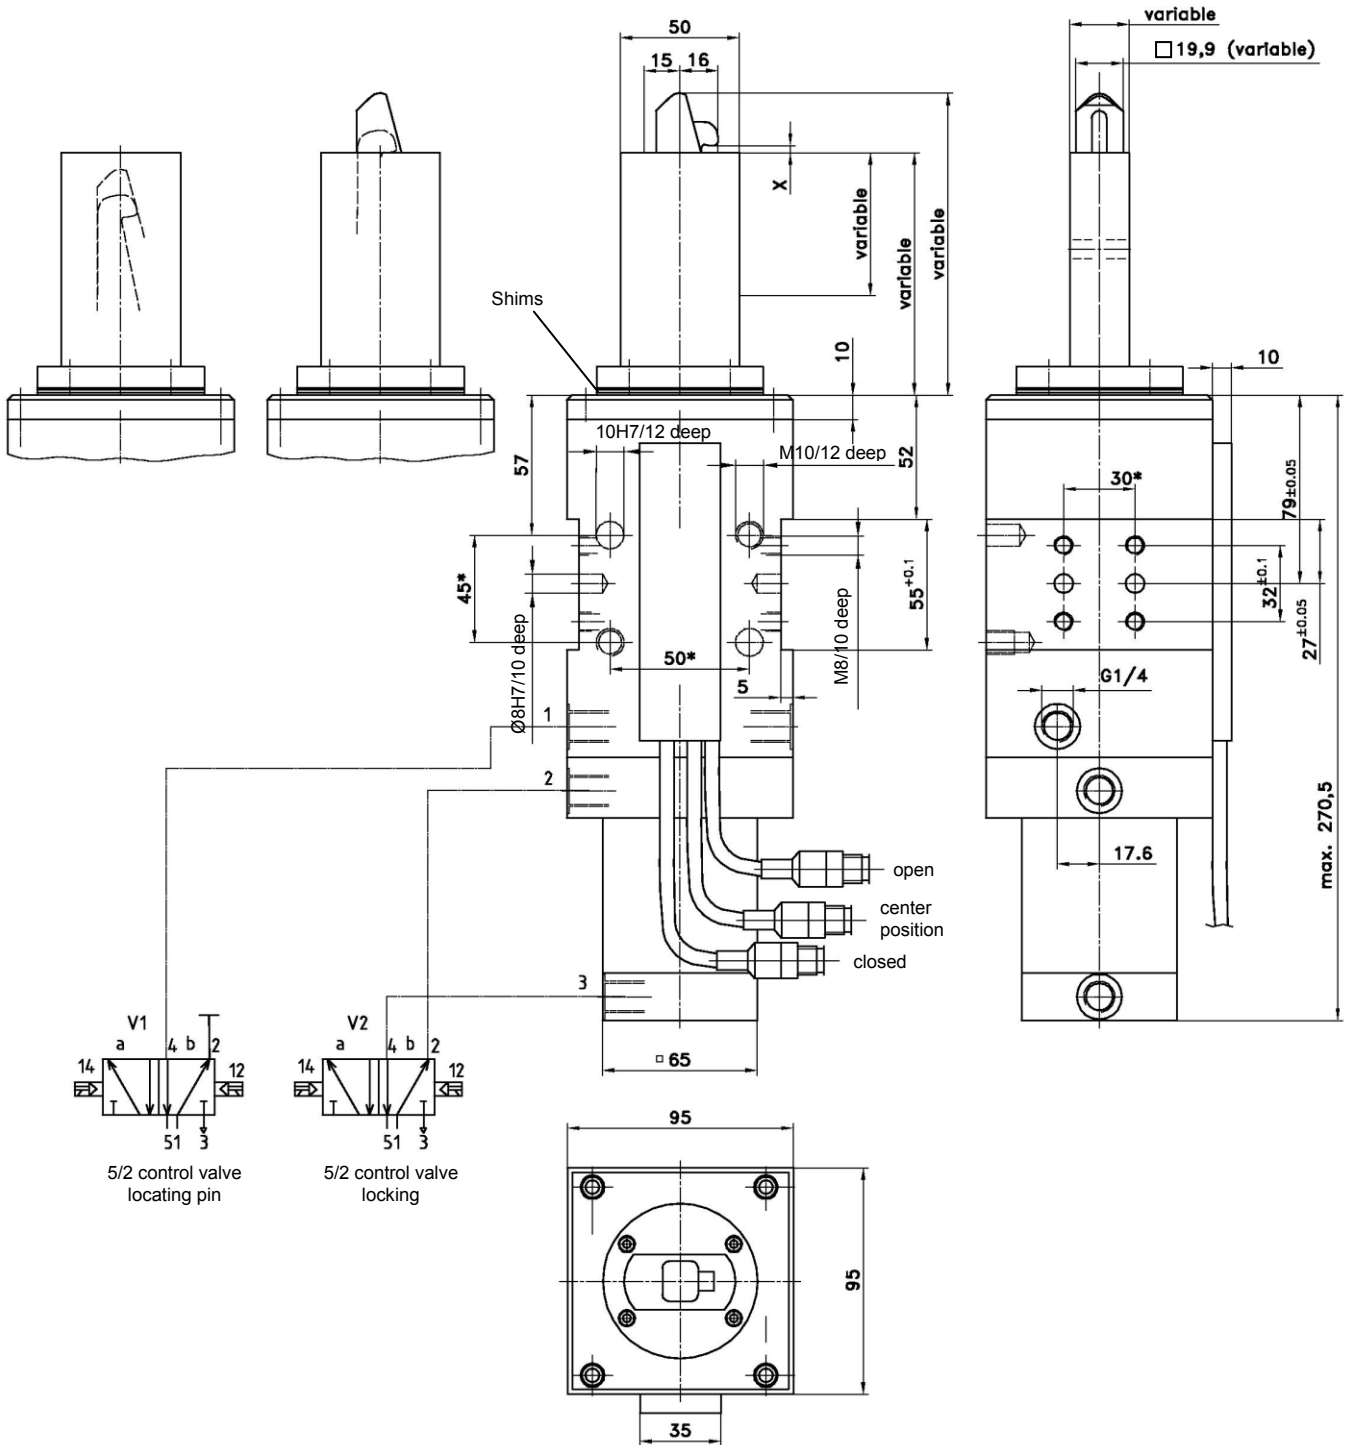

Ordering example:

SZ 50 UZ LB T31 19,9 X

SZ 50 UZ LB:

T31: Type
 □19,9: Sensing system
 X: Pin dimension
 Material thickness

Ordering example Tünkens sensing system:

...T31 Inductive sensing,
 3 connectors

Valves:

	V1	V2
1. Starting position Locating pin and clamping hook retracted	b	b
2. Locating pin extended	a	b
3. Clamping hook locked	a	a
4. Clamping hook unlocked	a	b
5. Locating pin retracted	b	b

Weight: ca. 7 kg

*Tolerance for dowel holes ± 0.02, for threaded holes ± 0.1,

Medium: Air, max. 6 bar, operation permitted with oil-free air.

Attention!

External throttle check valves must be provided on assembly. They are not included in the scope of delivery!