


Eco Retractable Locating Pin

with built-in control technology for a reduced air consumption,
anti-rotating, 60 mm stroke

SZE... .1 A..2

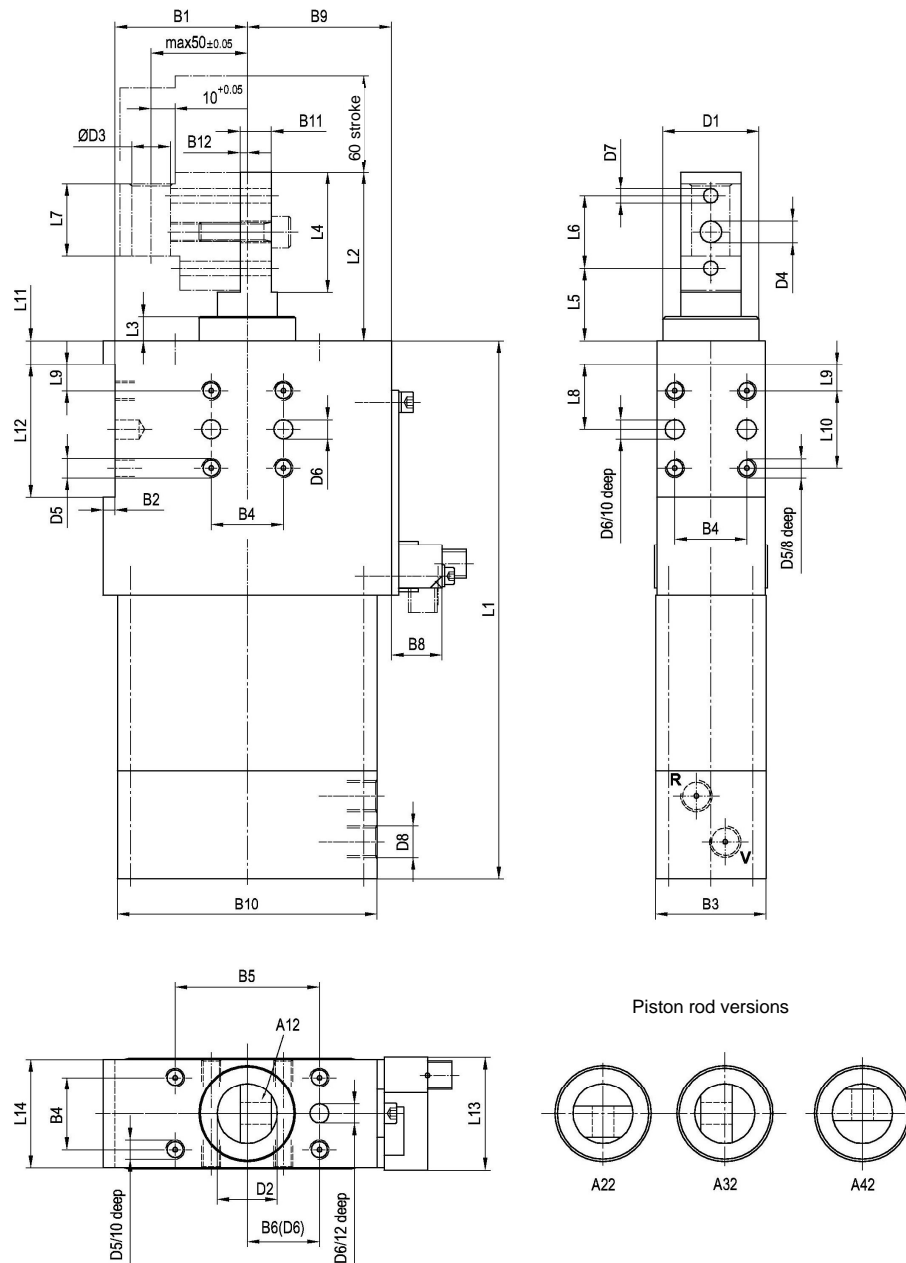

Ordering example:

SZE 63.1 A12 T12

SZE 63.1: Type
A12: Piston rod version
T12: Sensing system

Force during extension: 250 N at 6 bar

Ordering example Tünkers sensing system:

...T12 Inductive sensor 24 V, 1 output with integrated LED's

*Tolerance for dowel holes ± 0,02, for threaded holes ± 0,1.
Medium: Air, max. 6 bar, operation permitted with oil-free air.

Type	Stroke	Stat. side force max.	Piston Ø	Weight ~ (kg)
SZE 40.1 A..2	60	150 N	40	2,1
SZE 63.1 A..2	60	200 N	63	3,9

Attention!

External throttle check valves must be provided on assembly. They are not included in the scope of delivery!

Type	B1	B2	B3	B4*	B5 ±0,2	B6 ±0,02	B7 +0,05	B8	B9	B10	B11	B12 ±0,05	D1 f7	D2 f7	D3 H7	D4 H11	D5	D6 H7	D7 H7
SZE 40.1 A..2	32,5	5	45	30	60	30	-	21	37,5	75	13	3	40	25	16	9	M8	8	6
SZE 63.1 A..2	55	5	46	30	60	30	-	21	60	108	13	3	40	25	16	9	M8	8	6

Type	D8	L1	L2	L3	L4	L5	L6 ±0,02	L7	L8 ±0,05	L9 ±0,1	L10 ±0,1	L11	L12 +0,1	L13	L14
SZE 40.1 A..2	G1/8	251	70	10	50	30	30	30	27	11	32	10	55	47	45
SZE 63.1 A..2	G1/4	264	70	10	50	30	30	30	27	11	32	10	55	47	45