



for locating pins, anti-rotating, 40 mm stroke



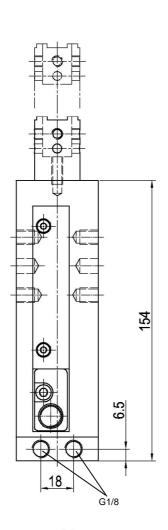

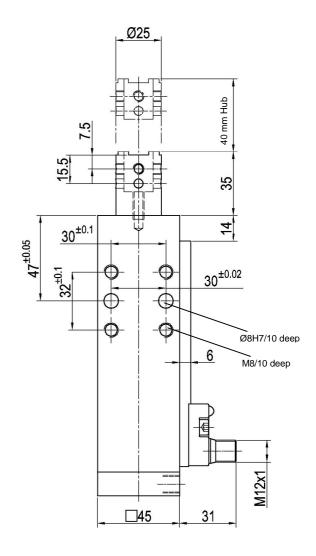



## Ordering example:

SZK 30.7 BR2 T12

SZK 30.7 BR2: Type

T12: Sensing system

## Ordering example Tünkers sensing systems:

...T00 Without sensing system
...T12 Inductive sensor 24 V, 1 output
with integrated LED's

Control pressure: 5 bar
Cylinder force extended: 350 N
Cylinder force retracted: 250 N
Weight: 1.2 kg

\*Tolerance for dowel holes  $\pm$  0.02, for threaded holes  $\pm$  0.1.

## Attention!

External throttle check valves must be provided on assembly. They are not included in the scope of delivery!