
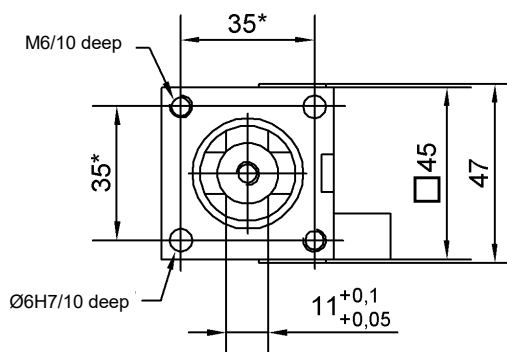
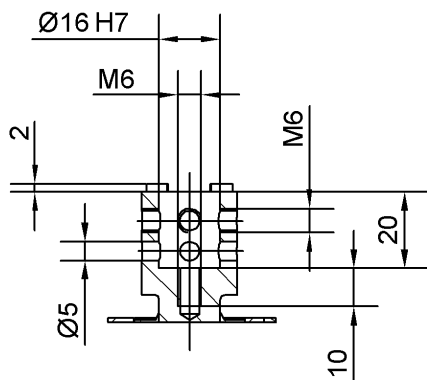
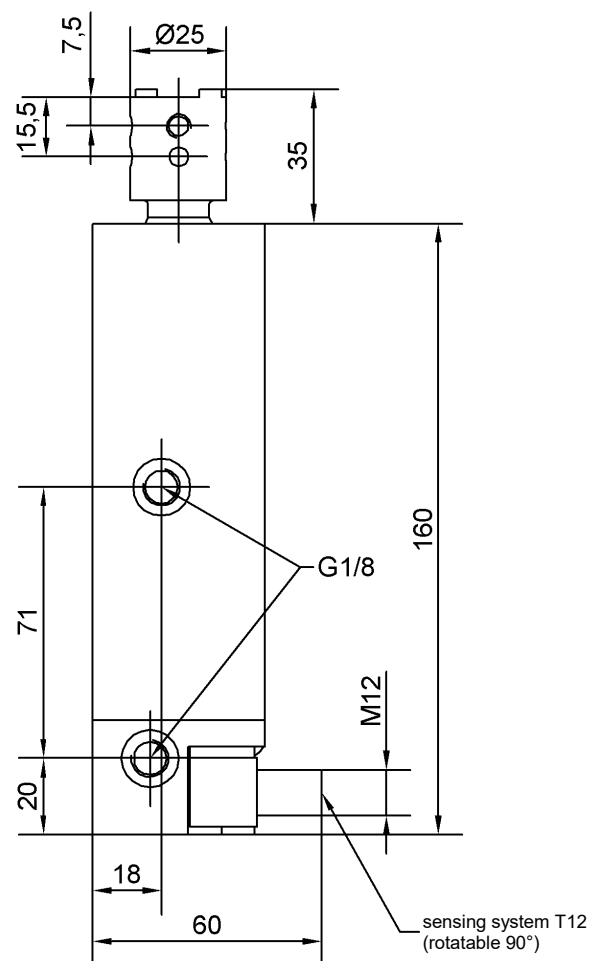


Retractable Locating Pin

for locating pins, anti-rotating, 40 mm stroke

SZK 30.8

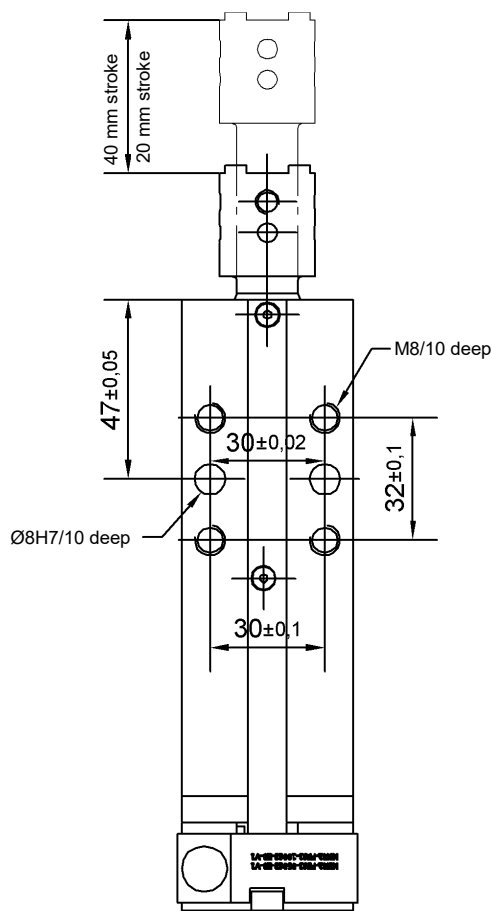

Ordering example:

SZK 30.8 x 40 T12

SZK 30.8: Type
40: Stroke, further strokes
(e.g. 20 mm) on request
T12: Sensing system

Piston Ø: 30

Tensile force: 250 N at 5 bar
Pressing force: 350 N at 5 bar

Weight: ~ 1.3 kg

*Tolerance for dowel holes ± 0.02 ,
for threaded holes ± 0.1 .

Medium: Air, max. 6 bar,
operation permitted with oil-free air.

Ordering example Tünkers sensing systems:

...T00 Without sensing system
...T12 Inductive sensor 24 V, 1 output
with integrated LED's

Attention:

External throttle check valves must be provided on
assembly.
They are not included in the scope of delivery!

