


# Pneumatic Power Clamp

Totally enclosed, self-locking type

# K/K2 32...

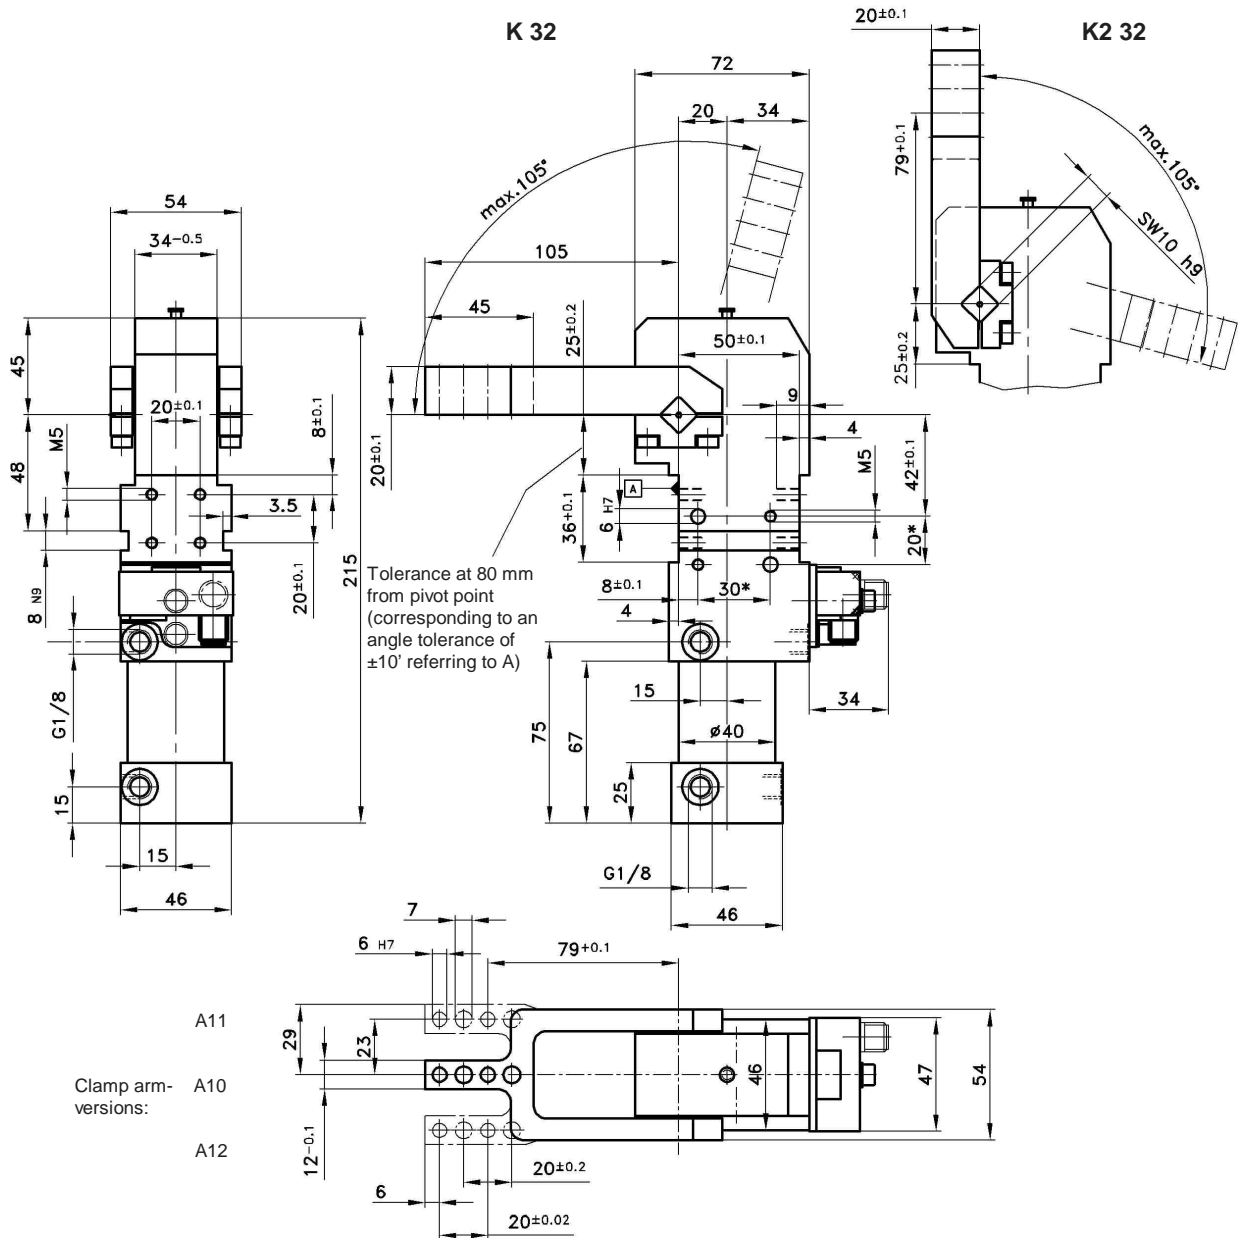

**Ordering example:**

K 32 A10 T12 105°

K: Type  
 32: Piston Ø  
 A10: Clamp arm version  
 T12: Sensing system  
 105°: Opening angle

**Ordering example Tünkers sensing systems:**

...T00 without sensing  
 ...T12 Inductive sensor, 24 V, 1 output with integrated LED's

**Standard opening angle:**

K/K2 32 = 105°

**Special opening angles:**

Available in intervals of 15° between 45° and 105°.

External throttle check valves must be provided on assembly. They are not included in the scope of delivery.

\*Tolerance for dowel holes ± 0,02, for screw holes ± 0,1.

Medium: Air, max. 6 bar, operation permitted with oil free air.

Type	Holding torque max.	Clamping-moment at 5 bar	Piston Ø	Weight (g)
K 32 T...	180 Nm	55 Nm	32	1500