


Pneumatic Power Clamp

totally enclosed, self-locking type, with hand lever

K/K2 32 Z

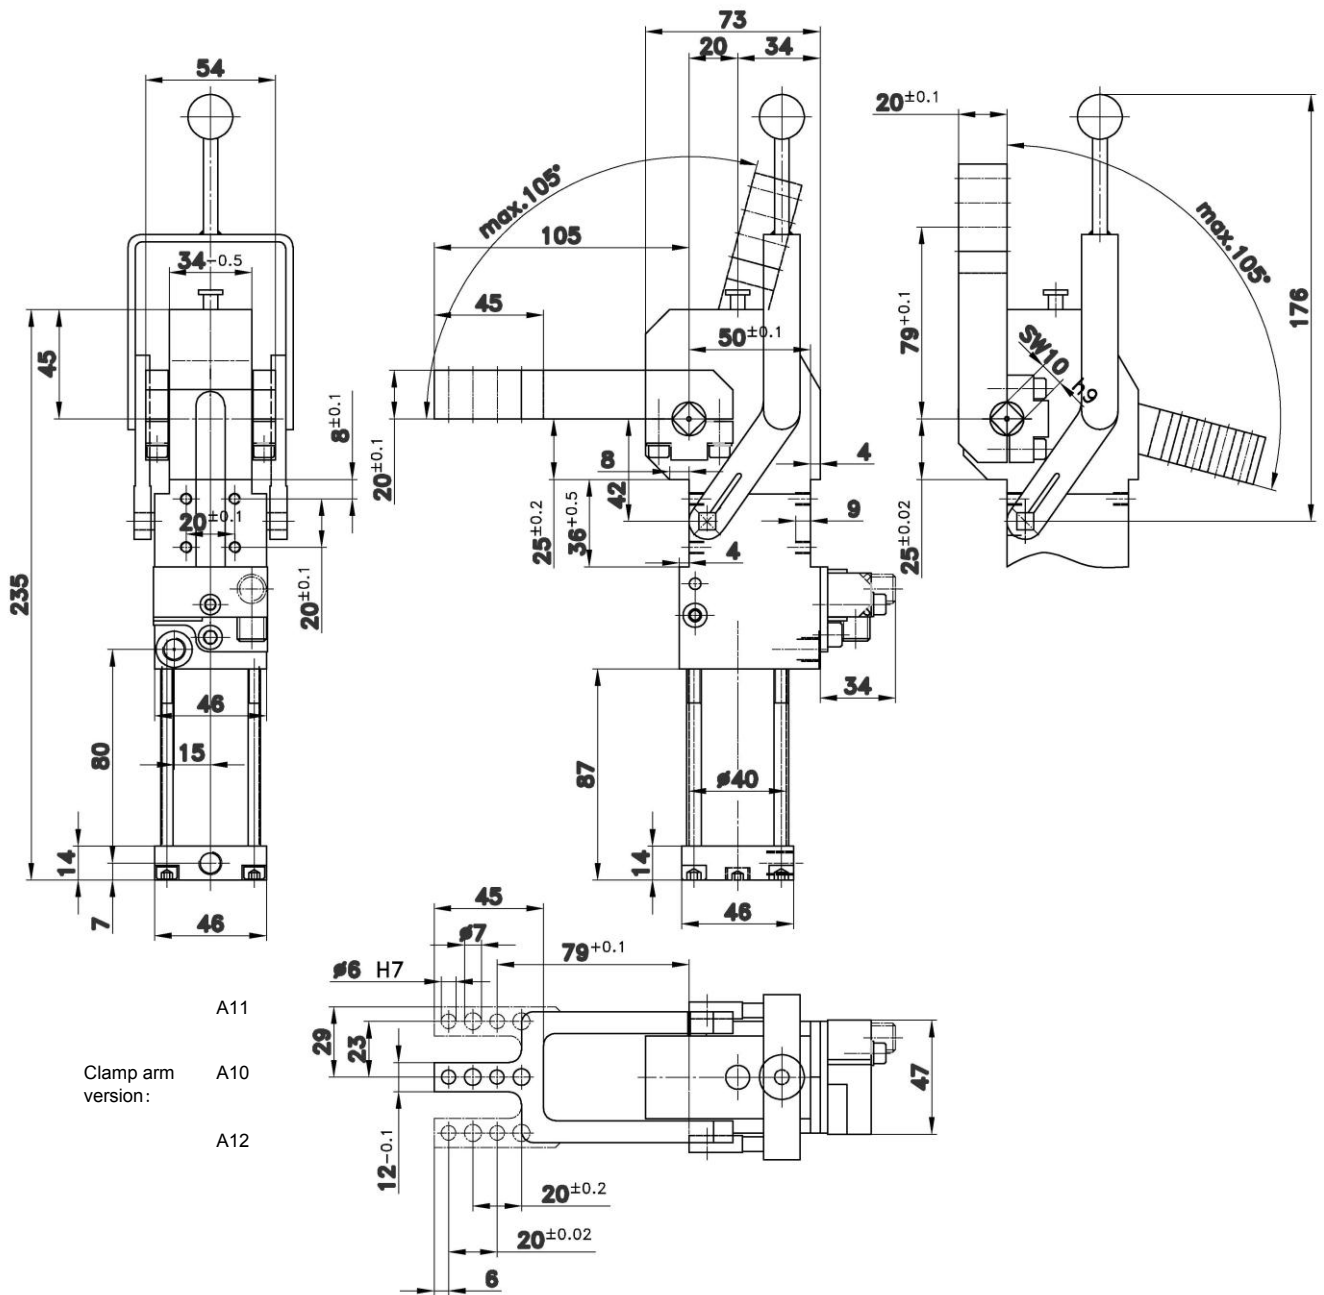

Ordering example:

K 32 Z A10 T12 105°

K: Type
 32: Piston Ø
 Z: Hand lever
 A10: Clamp arm version
 T12: Sensing system
 105°: Opening angle

Standard opening angle:

105°

Special opening angles:

Available between 45° and 105° in increments of 15°.

Attention:

External throttle check valves must be provided on assembly. They are not included in the scope of delivery.

*Tolerance for dowel holes ± 0.02 , for threaded holes ± 0.1 .

Ordering code Tünkers sensing systems:

...T00 Without sensing system
 ...T12 Inductive sensor 24 V, 1 exit with integrated LEDs

Type	Holding torque max. (Nm)	Clamping moment at 5 bar (Nm)	Operating pressure (bar)	Max. pressure (bar) with oil-free air	Opening and closing time (sec.)	Connection (G)	Weight (kg)
K/K2 32 Z	180	55	6	5	1	1/8	1.85

